




OPEN UTILITY



CONTINENTALCARGOTRAILER.COM/OPEN-ALUMINUM-UTILITY-TRAILER

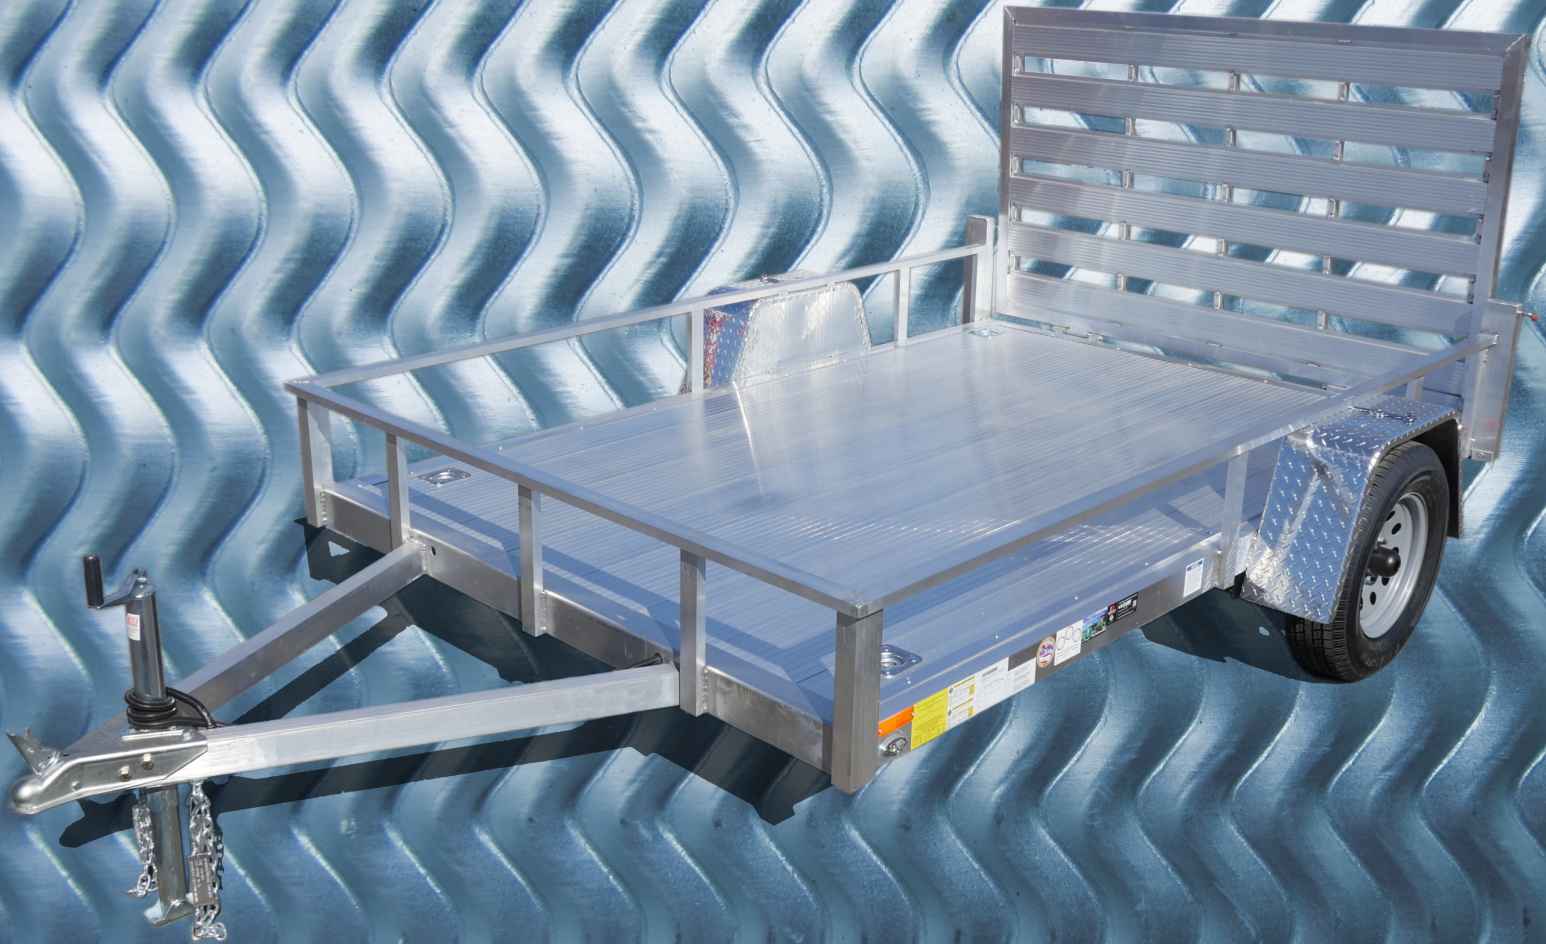


FOREST RIVER

FORESTRIVERINC.COM



OPEN UTILITY

Open Aluminum trailers range in size from a 5' x 8' single axle to 7' x 18' tandem axle car hauler. The standard payload capacities range from 1,800 to 5,985 lb. with open utility trailers and 5,400 lb. on the 7' x 18' open car hauler. The standard flooring is constructed from 5/4 x 6" treated wood planks.

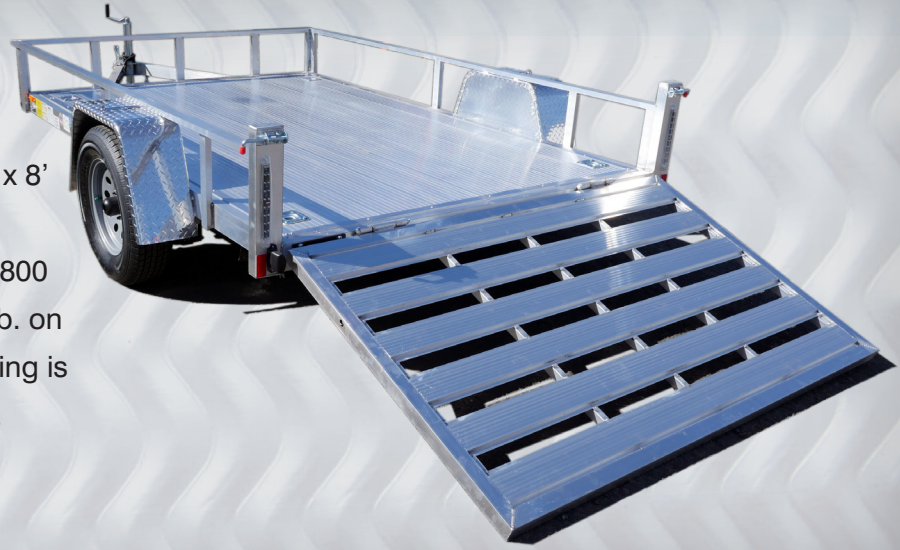

OPEN UTILITY STANDARD FEATURES

- Aluminum Tube Frame
- 13" Side Rails
- Removable Rear Ramp
- Treated Wood Deck
- Electric Brakes w/Breakaway and Battery (Tandem Axle Models)
- E-Z Lube Hubs
- Silver Powder-Coat Wheels
- Safety Chains
- Aluminum Tube Tongue
- LED Lights
- Spring Loaded Gate Latches
- Silver Jack Coupler
- Tandem Removable Fenders
- Chrome Lug Nuts
- Chrome Center Caps
- Radial Tires

OPEN UTILITY OPTIONAL FEATURES

- Spare Tire Carrier with Cover (Tongue Mount)
- Fold-Down Stabilizer Jacks (1,000 lb. Capacity)
- Extruded Aluminum Floor
- ST205/75R15 Spare Tire with 5-Bolt Silver Wheel
- Aluminum Wheel with Center Cap and Lug Nuts (5-Bolt; 3,500 lb.)
- Motorcycle Wheel Chocks (Removable, Shipped Loose)
- Recessed Floor-Mount D-Ring Tie-Down (Installed)
- Mesh Enclosed Sides
- ATP Enclosed Sides
- 48" Side Ramp Gate
- 60" Side Ramp Gate
- Reinforce Existing Standard Rear Ramp Door

SEE OUR TRAILER SPECS AT:
CONTINENTALCARGOTRAILER.COM/OPEN-ALUMINUM-UTILITY-TRAILER

